


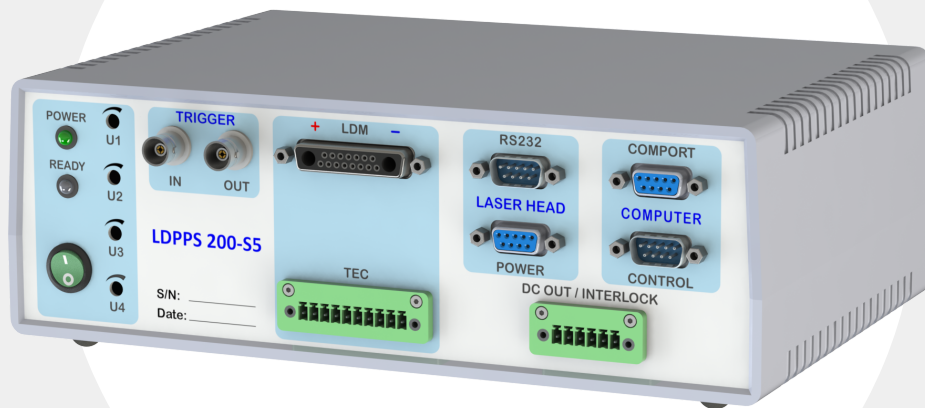

LDPPS

High power laser diodes driver and TEC controller

High Power Laser Diodes Pump Power Supply of LDPPS series is combined laser diode driver and 2 independent thermoelectric controllers. It is designed to provide pulsed and continuous modes of operation for laser diode modules.

Features

- Provides up to 400 A LD current and up to 200 V LD voltage¹ (up to 400 V in OEM version);
- Precisely set LD voltage via VLC software;
- Control of the of LD current pulses timing in a wide range of parameters;
- Input and output connectors for synchronization with external devices;
- 2 independent thermoelectric controllers (TEC1, TEC2) and one additional temperature sensor (Ths3);
- Power supply for additional low-power pilot laser;
- Measurement of external photodiode signal;
- 3 external interlocks;
- Controlled from computer via COM port connector.

Specifications

LDM

Peak LDM current	400 A
Max bias current	50 A
Max LDM voltage	200 V ¹
LDM average power	≤ 600 W
LDM working pulse length	40 ÷ 100 000 μs
Repetition rate	0.1 Hz ÷ 10 kHz
Instability of the current amplitude	≤ 1 %

TEC1 & TEC2 (Peltier elements)

Range of the temperature control	– 50 ÷ 120 °C
Discreteness of the temperature control	± 0.1 °C
Max voltage	22 V
Max current	2 × 8 A
Additional Temperature Interlock Ths3	– 50 ÷ 120 °C

¹ Table 1 – typical available configurations for LD power supply. Other optimized power supply configurations can be provided for specific LD parameters.

LD voltage, V	2-25	2-50	50-100	100-150	150-200	up to 400**
Max average LD current, A	18 / 25*	9 / 12*	3 / 6*	3	3*	**

* In this configuration TEC1 and TEC2 are unavailable.

** OEM version. Max LD current depends on specific LD and mode of operation.

EXTERNAL TRIGGER

Pulse amplitude $U_{\text{trig_in}}$ (Impedance = 1 k Ω)	5 V $\pm$ 20 %
---	----------------

Pulse duration	> 2 μ s
----------------	-------------

OUTPUT TRIGGER

Pulse amplitude $U_{\text{trig_out}}$ (Impedance $\geq$ 1 k Ω ²)	5 V $\pm$ 20 %
--	----------------

Pulse duration	5 μ s
----------------	-----------

Adjustable range of output trigger delay	0 $\div$ 3900 μ s
--	-----------------------

BUILT-IN POWER SUPPLY OF PILOT LASER

Voltage	5 V
---------	-----

Max current	200 mA
-------------	--------

EXTERNAL PHOTO DETECTOR

Linear range of the photocurrent measurements	0.01 $\div$ 160 μ A
---	-------------------------

EXTERNAL POWER SUPPLY

Voltage	100 $\div$ 260 VAC
---------	--------------------

Frequency	47 $\div$ 63 Hz
-----------	-----------------

GENERAL

Dimensions	260 $\times$ 180 $\times$ 92 mm ³
------------	--

Weight	2200 g
--------	--------

Operating temperature	+ 5 $\div$ + 45 $^{\circ}$ C
-----------------------	------------------------------

2 50 Ω under special request.